


Product sheet

CLAYTEC[®]
Building with Clay

Hessian mesh Item No. 35.002

- Traditional und eco-friendly

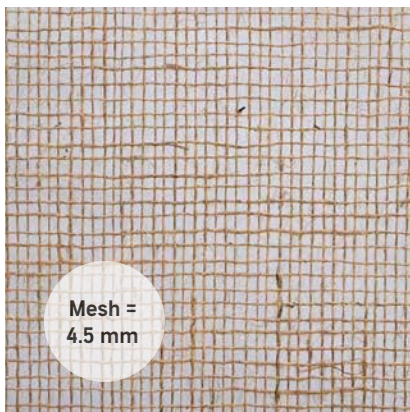

Surface reinforcement for all clay plasters. The CLAYTEC hessian mesh is a canvas fabric made from jute yarn, dressed with polysaccharide (starch). Hessian mesh is a classic, eco-friendly plaster reinforcement mesh.

GERMANY
CLAYTEC GmbH & Co. KG
Nettetaler Straße 113-117,
41751 Viersen
Phone: +49 2153 918-0
www.claytec.de/en

For technical consulting service teams
and sales see www.claytec.de/en
Product data and application
see reverse

Hessian mesh

Item. No. 35.002

Application Surface reinforcement for clay plasters, wood fibre interior insulation, clay dry plasterboards with a full surface bond and wood fibreboard panels.

Composition Fabric from jute yarn, dressed with starch. Warp/weft approx. 21/20 fibres per 10 cm, mesh size approx. 4.5 x 4.5 mm

Supply form On rolls. Surface reinforcement, width 100 cm/ length 50 m.

Storage Can be stored for at least three years if kept dry, well-ventilated and protected against direct sunlight.

Amount required Surface reinforcement same as m² of plaster surface plus an additional 10-20% extra for offcuts and overlaps.

Processing Surface reinforcement: the reinforcement mesh is laid on the mortar when it is still freshly applied and malleable. It is then rubbed in with a smoothing board. Approx. 10 cm overlap must be provided in areas around joints.

Joint reinforcement: The mesh is plastered into place with a thin layer of clay topcoat fine; rub the mortar out if possible so that the joint area does not show through the finished plaster. Leave out the reinforcement mesh in areas around crossings. The plaster mortar used for installing the mesh must be fully dry before you resume plastering. (Reinforcement of the board joints alone is no longer a common technique and requires experience to execute correctly.)

For instructions on working with this product see:

